




SEBA Liquid Sampler KLL-S

Sampling System for depth related, unmixed samples in Groundwater and Open Waters

- For taking liquid samples starting from 2" well casings
- Robust, portable instrument with measuring tape and cable drum incl.
- Supporting frame for sampling of liquids in any desired depth
- Easy handling due to sophisticated technique
- Adaptable to existing SEBA electric contact meter KLL with 14 mm probe
- Easy to disassemble and easy to clean



Monitoring Well

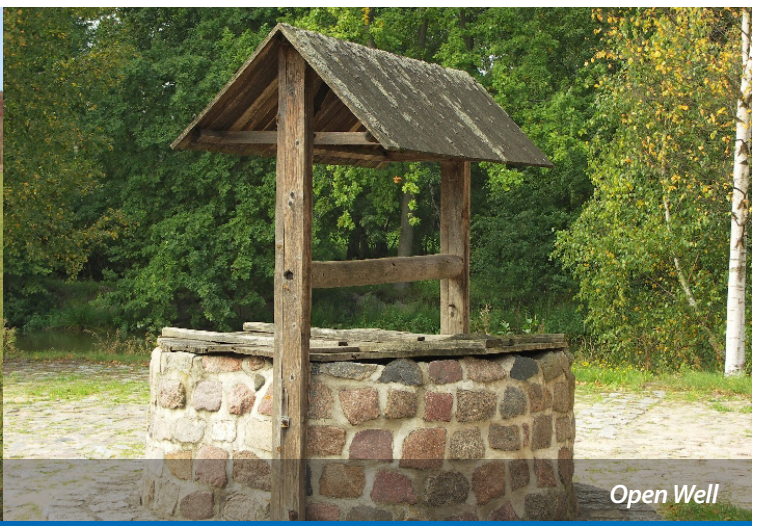

Open Well

Liquid Sampler with electric contact meter KLL


The liquid sampler KLL-S has technically been designed for the application in connection with the electric contact meter KLL. With this combination design, it is possible to obtain liquid samples from any desired depth.

Basically, the liquid sampler consists of three parts-piston, tube and releasing weight. In order to get a liquid sample, the tube is hooked above the piston first and then lowered. When the desired sampling depth is reached by means of the measuring tape, the weight on top is released, which slides downwards along the cable to the top of the tube. Here, the closing mechanism is activated and the tube is automatically slid over the pistons. The liquid sample can now easily be pulled out by means of the supporting drum and the liquid withdrawn by the attached faucet.

Available in two versions:

With 2" tube diameter (capacity 0.5 l; dimension: 49 mm 1750 mm)

With 4" tube diameter (capacity 1.0 l; dimension: 90 mm 1100 mm)

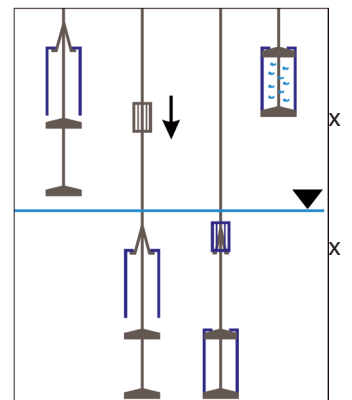

Liquid Sampler

| | |
|-----------------------------|---|
| Housing incl. parts: | aluminium anodized, stainless steel, POM; |
| Tube: | PVC, transparent |
| Drainage diameter: | Ø 5 mm |
| Fixing device: | 2" / 4" tube version with fixing at drum. |



Technical data Electric Contact Meter

| | |
|---------------------------------------|---|
| Cable: | Polyethylene with 2 steel cores, metric scale with red meter marking and black for decimeter and centimetre |
| Cable drum: | PVC |
| Carrying handle/support: | Aluminium coated |
| Operation depth: | The liquid samplers are available in the following cable length in combination with the SEBA Electric contact meter: 30 m / 50 m / 80 m / 100 m / 150 m / 200 m / 300 m / 400 m / 500 m |
| Accuracy of the cable marking: | < 1 cm with a cable length of 100 m |

The right is reserved to change or amend the foregoing technical specification without prior notice

Contact:

SEBA Hydrometrie GmbH & Co. KG • Gewerbestraße 61 A • 87600 Kaufbeuren • Germany
 Telefon: +49 (0) 8341 96 48 - 0 • E-Mail: info@seba.de • Web: www.seba.de